

English

intelbras

User manual

XAS Connect
XAS Connect Black



XAS Connect and XAS Connect Black **Wired magnetic opening sensor**

Congratulations, you have just purchased a product with Intelbras quality and safety.

The magnetic sensors XAS Connect and XAS Connect Black are compact and discreet. Suitable for indoor environments, these products are ideal for installation on doors, windows, etc., both of wood, glass, and lighter metal alloys. Read the product introductory information carefully for the correct use of the sensor.

Care and security

- » Install the sensor in a stable location, that is, that there will be no vibrations;
- » Respect the distance from the GAP - **always use the smallest GAP possible**;
- » To clean the sensor, use a damp cloth, never use chemicals;
- » If you are going to use the sensor as a switch to trigger a load, respect the specified maximum voltage and current.
- » LGPD - General Law for the Protection of Personal Data: Intelbras does not access, transfer, capture, or perform any other type of treatment of personal data from this product.

¹ GAP is the distance between the reed switch and the magnet.

Summary


1. Technical specifications	5
2. Product	5
3. Installation	6
Warranty term	8

1. Technical specifications

Maximum voltage at the alarm output	± 100 V
Maximum current	500 mA
Operating temperature	-10 °C to + 50 °C
Detection method	Magnetic field
Alarm output	NF
Anti-UV protection	Yes
Environment	indoor
Maximum GAP ¹	25 mm ± 10%
Security GAP ¹	≤ 15 mm ±10%
Dimensions (W × H × D ²)	Reed switch: 63 × 13.4 × 18.5 mm Magnet: 63 × 13.4 × 12 mm


¹ GAP is the distance between the reed switch and the magnet.

² All tolerance measurements of ± 2 mm.

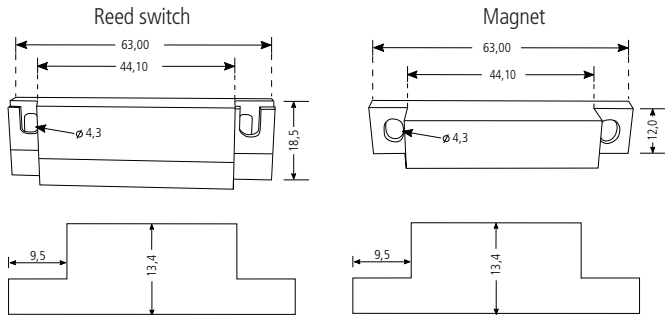


2. Product

- 1. Reed switch sensor;
- 2. Magnet;
- 3. Reed switch protection cover;
- 4. Terminal for cable connection;
- 5. Screw hole for attaching.

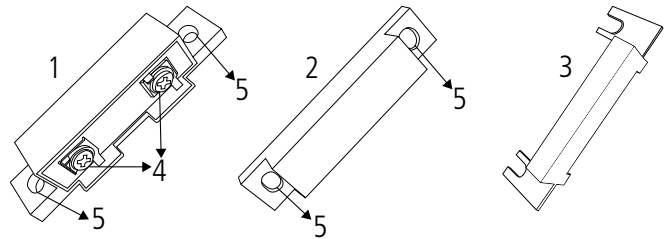


3. Installation

1. Remove the protective cover from the reed switch by pulling up.

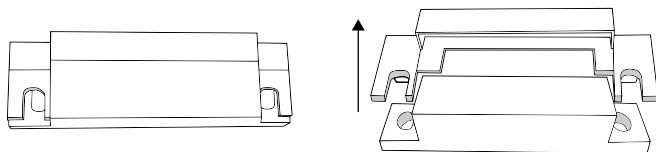


2. Use the screw holes to fix the reed switch and the magnet or, if you prefer, use the double-sided tape that comes with the product.

Note: in case of using double-sided tape, it is recommended that the surface is clean and free of porosity for better adhesion.

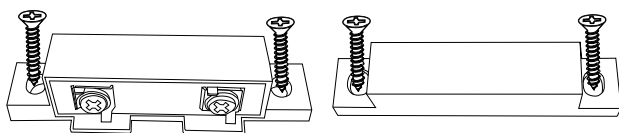


3. Attach the magnet to the moving part and the reed switch to the attached part of the structure.

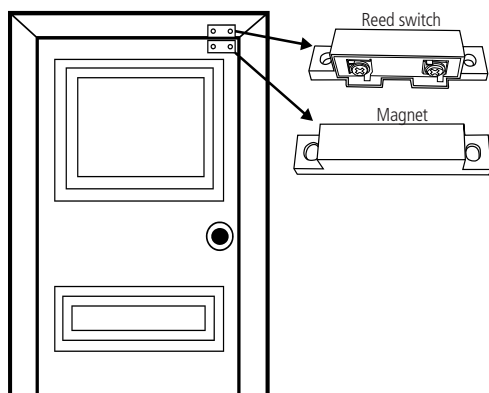


4. Check that the distance from the GAP is within the specified, to avoid unwanted triggering in case of any vibration in the structure where the sensor is installed.


- » **Maximum GAP:** $25 \text{ mm} \pm 10\%$
- » **Security gap:** $\leq 15 \text{ mm} \pm 10\%$
- » Always use the lowest GAP possible

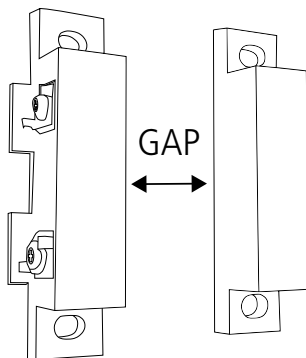


5. Pass the cable through the opening located on the reed switch. This prevents the cable from interfering with the closing of the protective cover.



6. Connect the cable to the terminals of the reed switch and the entrance to the zone of the control panel, as shown in the following image:

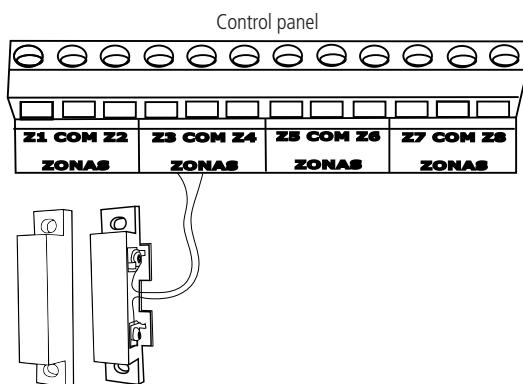

7. After installation, put on the protective cover of the reed switch and check that when moving the magnet away from the reed switch, the alarm panel goes off indicating that there was tampering. If necessary, adjust the position of the sensor.

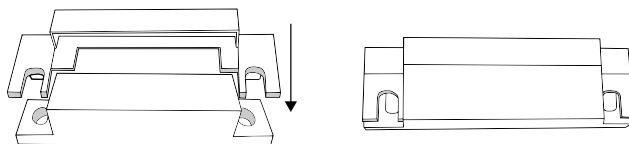

Warranty term

It is established that this warranty is granted upon the following conditions:

Client's name:

Client's signature:

Invoice number:

Date of purchase:

Model:

Serial number:

Retailer:

1. All the parts, pieces and components of the product are guaranteed against possible manufacturing defects, which may arise, for the term of 1 (one) year - this being 90 (ninety) days of legal warranty and 9 (nine) months' contractual warranty –, counting from the date of purchase of the product by the Consumer, as appears in the product purchase bill of sale, which is an integral part of this Term throughout the domestic territory. This contractual warranty includes the free exchange of parts, pieces and components which have a manufacturing defect, including the expenses with labor used in this repair. If there is no manufacturing defect, but defect(s) arising from misuse, the Consumer shall bear these expenses.
2. The installation of the product shall be executed in accordance with the Product Manual and/or Installation Guide. If your product requires the installation and configuration by a qualified technician, seek a suitable specialized professional, the costs of these services not being included in the product amount.
3. Having perceived the defect, the Consumer shall immediately contact the nearest Authorized Service which appears in the report offered by the manufacturer – they are the only ones authorized to examine and remedy the defect during the warranty term foreseen herein. If this is not respected, this warranty shall lose its validity, as it shall be characterized as product infringement.
4. If the Consumer requests home service, it shall contact the nearest Authorized Service to inquire about the technical visit rate. If it is necessary to remove the product, the ensuing expenses, such as those of transportation and insurance of the taking and return of the product, shall be the Consumer's responsibility.
5. The warranty shall lose its validity totally in the occurrence of any of the following cases: a) if the defect is not one of manufacture, but is caused by the Consumer or by third parties foreign to the manufacturer; b) if the damage to the product arises from accidents, disasters, agents of nature (lightning, floods, landslides, etc.), humidity, voltage in the electrical network (excess voltage caused by accidents or excessive fluctuations in the network), installation/use in disagreement with the user's manual or arising from natural wear of the parts, pieces and components; c) if the product has undergone effects of a chemical, electromagnetic, electrical or animal (insects, etc.) nature; d) if the serial number of the product has been falsified or erased; e) if the appliance has been infringed.
6. This warranty does not cover loss of data; therefore, it is advisable that if it is the case of the product, the Consumer makes a backup regularly of the data which appears in the product.
7. Intelbras is not responsible for the installation of this product, or for possible attempts at fraud and/or sabotage in its products. Maintain the updates of the software and applications used up-to-date, if it is the case, as well as the network protection required for defense against hackers. The equipment is guaranteed against defects in its usual conditions of use, it being important to bear in mind that, as it is electronic equipment, it is not free of fraud and scams which may interfere with its correct functioning.
8. After its useful life, the product must be delivered to an authorized Intelbras service center or directly disposed of in an environmentally appropriate manner to avoid environmental and health impacts. If you prefer, the battery, as well as other unused Intelbras brand electronics, can be disposed of at any Green Eletron collection point (waste management facility to which we are associated). If you have any questions about the reverse logistics process, please contact us at (48) 2106-0006 or 0800 704 2767 (Monday to Friday 8am to 8pm and Saturdays 8am to 6pm) or via -mail support@intelbras.com.br.

These being the conditions of this complementary Warranty Term, Intelbras S/A reserves the right to alter the general, technical and esthetic features of its products without prior notice.

All the images of this manual are illustrative.

intelbras



talk to us

Customer Support: ☎ (48) 2106 0006

Forum: forum.intelbras.com.br

Support via chat: chat.intelbras.com.br

Support via e-mail: suporte@intelbras.com.br

Customer Service: 0800 7042767

Where to buy? Who installs it? 0800 7245115

Imported to Brazil by: Intelbras S/A – Indústria de Telecomunicação Eletrônica Brasileira
Rodovia SC 281, km 4,5 – Sertão do Maruim – São José/SC – 88122-001
CNPJ 82.901.000/0014-41 – www.intelbras.com.br

01.23
Made in China