



- » Intel® J3455 with Quad-core 1.5 GHz frequency
- » Intel HD® 500 with base frequency of 250 MHz
- » 2 RJ45 doors 10/100/1000. Intel I211AT High-performance Gigabit
- » 1 LED Storage indicator
- » 1 LED Power status indicator
- » 1 RJ45 entry for serial RS-232
- » 64 Gb mSATA memory
- » 2 MB Cache
- » SIP 2.0 (RFC 3261) and RFC 2543. PJSIP, among others i depend on your configuration
- » 1 RJ45 entry for serial RS-232
- » 1 Headphone output and 1 Microphone input
- » 1 VGA output maximum resolution of 2048×1536
- » 1 HDMI output maximum resolution 3840×2160
- » VGA + synchronous or asynchronous HDMI
- » DC power supply 12-19V/5A



The IAP 1000, is an industrial appliance, that is, a platform for services, which can aggregate any software/service solution or operating systems (Windows® 10, Linux, among others), more specifically for applications in corporate communication, as is the case of PABx developed in Asterisk.

Generic technical specifications

LED for signaling	2 LEDs: 1* On indicator and 1* HD indicator
Feeding	12 V~19 V power band
Power button	1* Push button button for on and off function
Reset button (RST)	1* Push button button for equipment restart function
USB port	2* USB2.0 and 2* USB3.0 Supports Max. +5V/1A
COM1 Port	1* RJ45 Port RS-232
Audio	1* AUDIO output and 1* MIC input
Video	1* VGA max. supported resolution 2048x1536 and 1* HDMI max. supported resolution 3840*2160
Chart Control	Intel HD Graphics
Source connector (DC 12V~19V)	1* Connector for external source P4.
Serial	1 port RJ45 COM.

Network technical specifications

Network interface (LAN 1/2)	10/100/1000 Mbps - RJ45
Processor	Apollo lake serial Processor - Intel J3455 Celeron
RAM	4 GB of installed RAM and DDR3 SODIMM 204 Socket Ram socket.
Memory	64 GB of mSATA storage 1* SATAII standard port, Maximum throughput 3Gb/s 1*M-SATA Socket, Support for SanDisk protocol, maximum rate 3gb/s
Bus expansion	1* Mini-PCIe socket, supports PCIE and USB signal equipment
Compatible systems	Windows [®] 10 Linux distributions (Fedora, Ubuntu, others) Free PBx
Server	J3455 CPU, 4G RAM, 64G SSD, WIFI 5.0
Network operation mode	2 LAN GB ports


Product technical specifications

Dimensions (L x A x P)	134 × 126 × 40.6 mm
Weight	1.5 kg
Power supply	External source (Automatic bivolt external source with 12V/5A output) -
Maximum consumption power	60 W
Operating temperature	-20°C ~ +60°C
Humidity	0% ~ 95%


Product Photos




Application Scenario - Solution for SBC

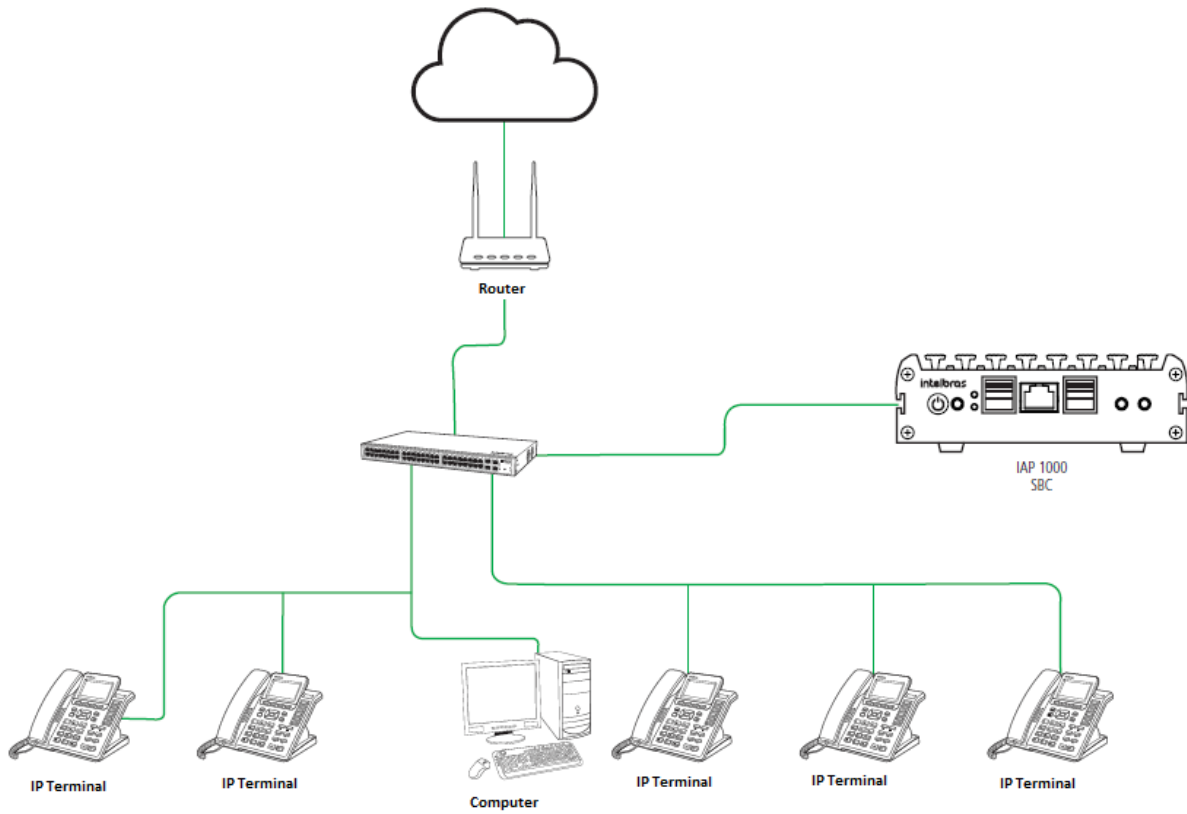


Application Scenario - Solution in Asterisk 1.18 PABx with 50 extensions

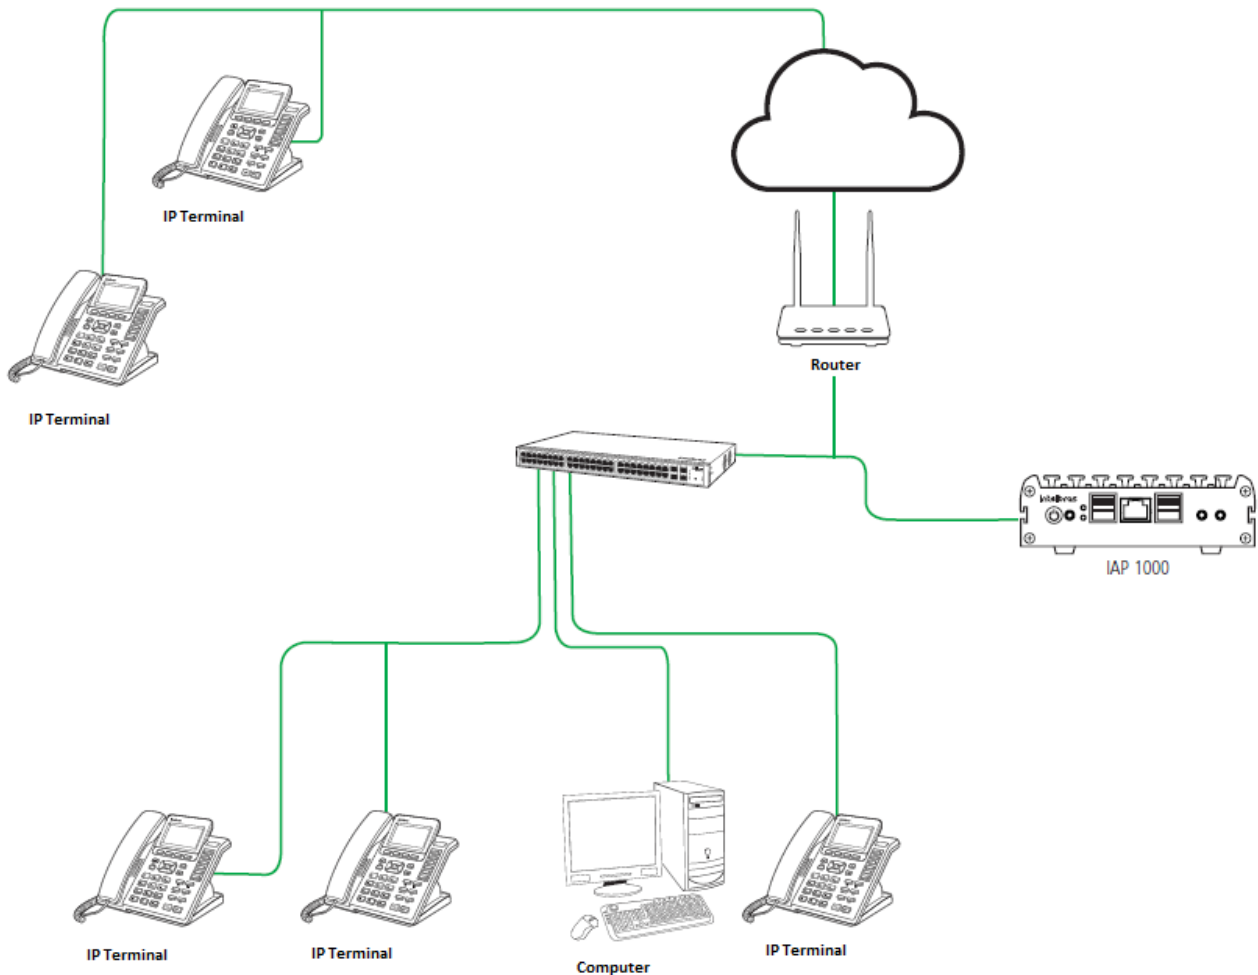

Application Scenario - Solution in Asterisk 16.7.0 PABx with 35 extensions

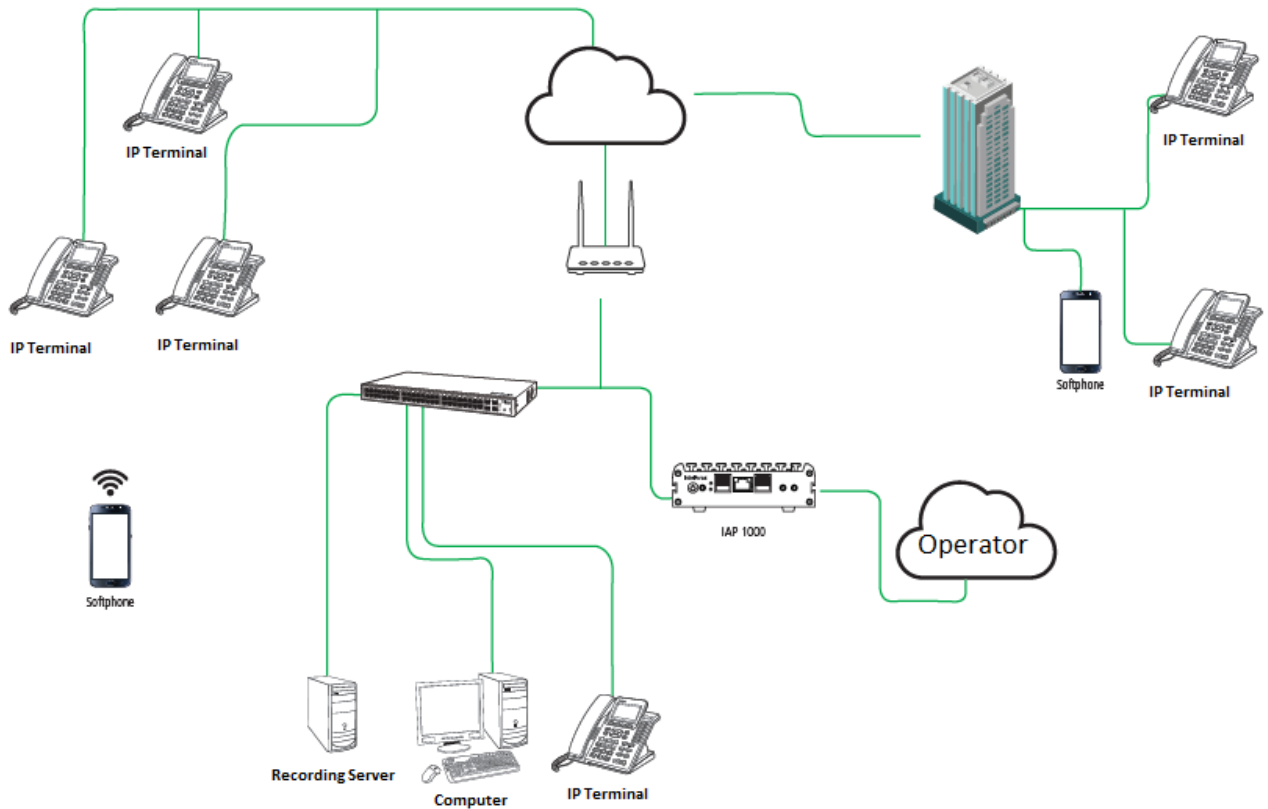

Application Scenario - Solution in Slackware Provisioning Server

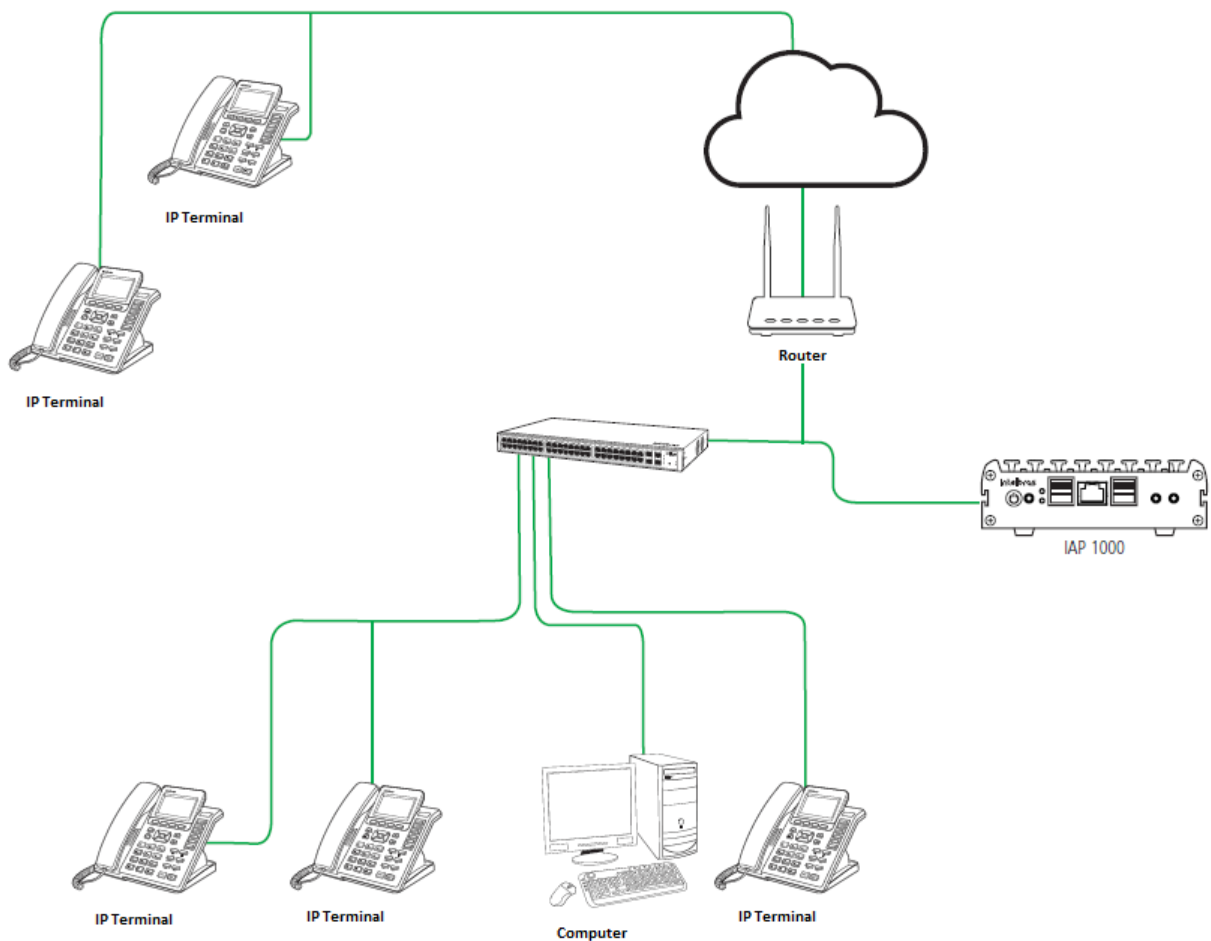

Application - Solution in Asterisk. V.11.25.3 PABX with 20 IP extensions

