



Installation guide

Impacta 68i recording card

Congratulations, you have just purchased a quality product and security Intelbras.

The Impacta 68i recording card is an accessory card that can be used only in the Impacta 68i telephone exchange, allowing the recording of up to 8¹ audio channels. Audio files are temporarily stored on an SD² card, connected to the board itself.

The Impacta 68i recording card is not supplied with the control unit.

For more information on the configuration of the Impacta 68i recording card, configuration/reading of recordings³ and approved SD cards, consult the ICR - Intelbras Call Recorder user manual on the website www.intelbras.com.br.

¹ For recordings above 4 audio channels, it is necessary to purchase the usage license.

² Item not included and required for recording.

³ The ICR software – Intelbras Call Recorder is required (license for use required) and USB cable.

1. Care and safety



Attention!

Only authorized technical personnel can open the PBX cover, as well as connect and handle its interfaces.

Carefully read all equipment information and follow all safety information.

- » Always consult a superior or immediate supervisor before starting work, informing the necessary procedures to perform the requested service and the necessary safety precautions.
- » Turn off system power during interface assembly or removal services.
- » Connect the grounding conductor to the system involved before starting. Never operate the equipment with the grounding conductor disconnected!

To avoid electrostatic damage to the Impacta 68i recording card, observe the following precautions:



Attention!


Static electricity can damage the board's electronic components. This type of damage can be irreversible or reduce the life expectancy of the device.

- » Use an antistatic wrist strap, or similar, to handle the card.
- » Transport and storage must only be carried out in static-proof packaging.
- » Place the card on a grounded surface when you take it out of the packaging.
- » Avoid touching the pins of integrated circuits or electrical conductors.
- » Always be properly grounded when touching the board or any component.

2. Technical specifications

Connection	SD card (32×24 mm)
	Length: 72 mm
Dimensional	Width: 12 mm
	Height: 58 mm
Weight	23 g
Recommended temperature	0 °C to 45 °C

3. Producto

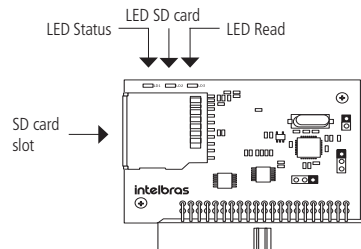


4. Installation

This board can only be connected to the Impacta 68i control panel, version 3.22.00 or higher.

To connect the Impacta 68i recording card follow the procedure:

1. Turn off the AC power of the Impacta 68i control unit and remove the cover;
2. The Impacta 68i recording card must be installed in the optional slots: OPC1 or OPC2;
3. Insert an approved SD card (item 6. Approved SD card) into the recording board as shown in the following image;
4. Replace the cover and turn on the AC power of the Impacta 68i control unit;

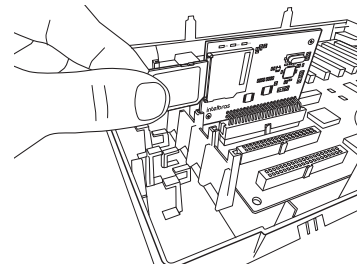

4.1. Cadence of LEDs

LED	Action	Description
Status	Flashing fast	Card not initialized
	Flashing slowly	Board initialized
	Wiped out	Defective board
SD card	Access	SD card inserted
	Wiped out	SD card not inserted
	Read	Flashing

Important: » Before using the card it is necessary to format it via web programmer.
» When using the SD card, check the need for formatting with the ICR – Intelbras Call Recorder manual.

5. Basic usage

For more information on configuring the Impacta 68i recording card and recording, consult the ICR – Intelbras Call Recorder's user manual at www.intelbras.com.br.

6. Homologated SD card

SDHC type, class 6 or higher (micro-SD cards are not supported).

Approved Manufacturers: Kingston®, SanDisk®, Transcend®, Toshiba®, Samsung® and Panasonic® (other models will not work).

Kingston is a registered trademark of Kingston Technology Company. SanDisk is a registered trademark of SanDisk Corporation. Transcend is a registered trademark of Transcend Information, Inc.

Warranty term

It is established that this warranty is granted upon the following conditions:

Client's name:

Client's signature:

Invoice number:

Date of purchase:

Model:

Serial number:

Retailer:

1. All the parts, pieces and components of the product are guaranteed against possible manufacturing defects, which may arise, for the term of 1 (one) year - this being 90 (ninety) days of legal warranty and 9 (nine) months contractual warranty – counting from the date of purchase of the product by the Consumer, as appears in the product purchase bill of sale, which is an integral part of this Term throughout the domestic territory. This contractual warranty includes the free exchange of parts, pieces and components which have a manufacturing defect, including the expenses with labor used in this repair. If there is no manufacturing defect, but defect(s) arising from misuse, the Consumer shall bear these expenses.
2. The installation of the product shall be executed in accordance with the Product Manual and/or Installation Guide. If your product requires the installation and configuration by a qualified technician, seek a suitable specialized professional, the costs of these services not being included in the product amount.
3. Having perceived the defect, the Consumer shall immediately contact the nearest Authorized Service which appears in the report offered by the manufacturer – they are the only ones authorized to examine and remedy the defect during the warranty term foreseen herein. If this is not respected, this warranty shall lose its validity, as it shall be characterized as product infringement.
4. If the Consumer requests home service, it shall contact the nearest Authorized Service to inquire about the technical visit rate. If it is necessary to remove the product, the ensuing expenses, such as those of transportation and insurance of the taking and return of the product, shall be the Consumer's responsibility.

5. The warranty shall lose its validity totally in the occurrence of any of the following cases: a) if the defect is not one of manufacture, but is caused by the Consumer or by third parties foreign to the manufacturer; b) if the damage to the product arises from accidents, disasters, agents of nature (lightning, floods, landslides, etc.), humidity, voltage in the electrical network (excess voltage caused by accidents or excessive fluctuations in the network), installation/use in disagreement with the user's manual or arising from natural wear of the parts, pieces and components; c) if the product has undergone effects of a chemical, electromagnetic, electrical or animal (insects, etc.) nature; d) if the serial number of the product has been falsified or erased; e) if the appliance has been infringed.
6. This warranty does not cover loss of data; therefore, it is advisable that if it is the case of the product, the Consumer makes a backup regularly of the data which appears in the product.
7. Intelbras is not responsible for the installation of this product, or for possible attempts at fraud and/or sabotage in its products. Maintain the updates of the software and applications used up-to-date, if it is the case, as well as the network protection required for defense against hackers. The equipment is guaranteed against defects in its usual conditions of use, it being important to bear in mind that, as it is electronic equipment, it is not free of fraud and scams which may interfere with its correct functioning.
8. After its useful life, the product must be delivered to an authorized Intelbras service center or directly disposed of in an environmentally appropriate manner to avoid environmental and health impacts. If you prefer, the battery, as well as other unused Intelbras brand electronics, can be disposed of at any Green Eletron collection point (waste management facility to which we are associated). If you have any questions about the reverse logistics process, please contact us at (48) 2106-0006 or 0800 704 2767 (Monday to Friday 8am to 8pm and Saturdays 8am to 6pm) or via -mail support@intelbras.com.br.

These being the conditions of this complementary Warranty Term, Intelbras S/A reserves the right to alter the general, technical and esthetic features of its products without prior notice.

All the images of this manual are illustrative.

intelbras



talk to us

Customer Support: (48) 2106 0006

Forum: forum.intelbras.com.br

Support via chat: chat.intelbras.com.br

Support via e-mail: suporte@intelbras.com.br

Customer Service: 0800 7042767

Where to buy? Who installs it? 0800 7245115

Produced by: Intelbras S/A – Indústria de Telecomunicação Eletrônica Brasileira
Rodovia SC 281, km 4,5 – Sertão do Marum – São José/SC – 88122-001 – CNPJ 82.901.000/0014-41
www.intelbras.com.br | www.intelbras.com