

PREMIUM

TELEPHONE SET


Dear consumer, we are very glad you have chosen a product from Intelbras line. Premium is a telephone set produced to meet the highest technology, intending to improve your expectations as well as to improve quality on communications.

INSTALLATION / MAINTENANCE

- Use a Telebras telephone standard socket.
- Avoid to install your telephone set in either hot or excessively moist places.
- To clean your telephone set, use a cloth moistened either in water or antistatic liquid only. Never use a dry cloth, because electrostatic discharges may occur, do not use also abrasive cleaning agents like alcohol, acetone, ether, etc.
- Smooth or varnished surfaces may become stained by some parts of the telephone set, the rubber feet, for instance. Thus, we recommend the use of antiskidding surfaces.
- Upon the expiration of the telephone set's lifetime, discard it, respecting the environmental protection rules.

Selection keys with the P (pulse) and T (tone) indications

In order to know the signaling mode of your telephone line, make a call with the key at the T (tone) position. If the call has been completed successfully, let the key at this position, because you will benefit from a faster dialing, besides a series of other services that your Telephone Company might offers. On the other hand, if the call fails to complete, this will indicate that your line has a decadic signaling mode. Then, let the key at the P position (consult your Telephone Company about the possibility of switching your line's signaling mode over multifrequency mode, and about the services it offers instead).

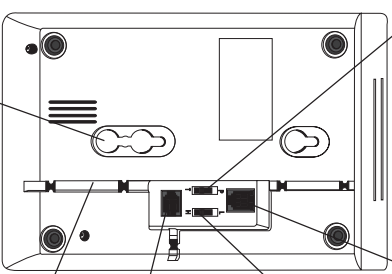

Fixing: To fasten the telephone set on the wall, you should mark the desired place, by following the drilling points described on the right side of this text. To drill the wall, use a 6-mm drill as well as compatible screws and nuts. Next, fit your telephone set in at the points indicated.

TECHNICAL FEATURES

- ☐ Keys for functions: **Flash, LND, Pause, Mode, Mute, * and #.**
- ☐ Decadic & Multifrequency Keyboard.
- ☐ Compatible with Telecommunications Network, CP-A-type central (Control by Stored Program), and PABX centrals.
- ☐ Dimensions in mm: length: 223,6 mm, maximum width: 148 mm, maximum height: 71 mm.

KEYS OPERATIONS


Resting pin: If your telephone set is fixed on the wall and there is the necessity of leaving it in waiting for someone to answer, you should use the resting pin, so that the handset remains in resting position without hanging up the call.

Mute: By pressing this key, the voice transmission is interrupted, that is, the person to whom you are speaking will not hear you anymore, however, you will keep hearing it. This situation persists as long as the key is being pressed.



Flash: This key causes a little break in multifrequency lines, and may be used in two situations:

for programming and use of the services offered by the Telephone Company, if the telephone is connected to telephone central, this key will be used by services offered through PABX. Factory-preprogrammed flash time: 300 ms.

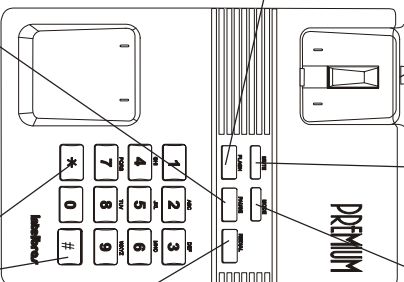

Tone: This key makes your telephone sets dialing mode to be changed temporarily from decadic into multifrequency mode. By pressing the key TONE, you will be sending information on multifrequency signaling (tone) until your handset is put down on the hook switch.

Example: you wish to consult your credit card's bill. Call the credit card administrator, as soon as the call is completed, press the TONE key. From that moment on, you will be sending numbers on the multifrequency mode, submitting your information in a faster and more secure way.

Redial: Your telephone automatically redials the last number used by you, obeying the maximum limit of thirty-two digits.

Pause: By pressing this key, you will introduce a pause on dialing that may be used when you are either connected to a PABX or another service offered by the Telephone Company. Example: you are connected to a PABX, and wish to call the number 0 XX 48 281 9500. Type the code for accessing the external line: *Press PAUSE + 0 XX 48 281 9500. If you hear a busy tone, hang up the telephone; next, press REDIAL, and wait, because your telephone set will automatically redial.



For the key-locking model:

The key is located on the rear side of the telephone set, and has as function to block up the keyboard, thereby preventing outgoing calls to be made, allowing incoming calls only.

Bell Electronics:

To agreement of volume of bell electronics indeed being used saw key: 5 (low), 6 and 7 (intermediate), and 8 (high). East volume of ring of bell being regulate quite seu telephone estas touch.

WARRANTY

Dear consumer,

Under the below mentioned terms and conditions INTELBRAS will cover the cost of replacement parts for one year as well as the labor required to install / service those parts. Simply bring your telephone set into your local INTELBRAS authorized dealer center and he will cover the charges. (Warranty period valid from date of purchase).

At the time of purchase from our authorized INTELBRAS dealer, your telephone set comes with a full 1 (one) year warranty of which 3 months represent a legal warranty and 9 months as contractual warranty. This warranty covers all problems which are due to manufacturer's defect and will not apply in case of inappropriate use of the product, by the customer or as a result of the following :

- Damages caused by lightning, flood, voltage fluctuation and inappropriate installation not in accordance with the product manual instructions.
- Any alterations in the product serial number.

Under the above conditions of this warranty close, INTELBRAS reserves the right to make any modification to its product without prior notice

For more information please contact our customer support service at : 0800-7042767

E-mail : support@intelbras.com.br

Code: 1124081

Manual's version: 0.1/05

Address :
INTELBRAS S/A
BR 101 - Km 210 - Area Industrial - CEP 881 04-800
São José - Grande Florianópolis/SC
Tel : +55 48 32819755 - Fax +55 48 3281 9505
Internet: http://www.intelbras.com