

TC 500


TELEPHONE SET

Dear consumer, thank you for buying one of INTELBRAS products. Gôndola is a telephone designed using the highest technology to meet your requirements and to improve the quality of your communications.

INSTALLATION / MAINTENANCE

- Avoid installing your telephone set where there is high temperature, excessive humidity and risk of explosion.
- You telephone set base may damage smooth and varnished surfaces. We suggest installing your telephone set on anti-slipping surfaces.
- Avoid using your telephone set after its lifetime validity expires. Follow the environment protection regulations to discard it.
- If your telephone set is desk mounted, make sure to place the handset in the correct position when you hangup your phone.

Selection keys with the P (pulse) and T (tone) indications. To define the signaling mode of your telephone line, make a call with the key at the T (tone) position. If the call has been successfully completed, it means your line uses DTMF (tone) signal. You will benefit from a faster dialing, besides a series of other services that your carrier may offer. If the call fails to complete, this indicates that your line has a decadic signaling mode. Select the position P (consult your carrier about the possibility to switch your line's signaling mode over Tone mode..

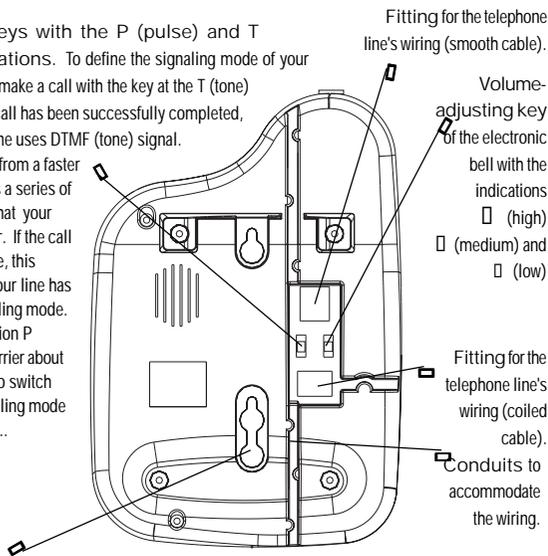

Fixing: Follow the drilling points to fasten your telephone onto the wall. Use a 6-mm drill as well as compatible screws and nuts. Once the screw is fasten, just hang your telephone onto the screw and push it downwards.

TECHNICAL FEATURES

- Keys for functions: Flash, Redial, Pause, Mode, Mute, * and #.
- Decadic & Multifrequency Keypad.
- Compatible with Telecommunications Network, CSP-type central (Control Stored Program), and PABX.
- Dimensions in mm: length: 223.6 mm, maximum width: 148 mm, maximum height: 71 mm.

KEYPAD OPERATIONS

Resting pin: If your telephone set is wall mounted and a call is placed on hold, this feature will allow the handset to rest in vertical position without disconnecting the call.

Mode: This key alters the dialing mode from decadic to multifrequency. when pressed, you telephones communicates multifrequency signals (tone) until you hang up the phone.

Exp: you wish to consult your credit card bill. Call the credit card administrator, as soon as the call is completed, press the TONE key for your telephone to communicate in multifrequency mode, submitting your information in a faster and more secure way.

Pause: Pressing this key, will introduce a dialing pause that may be used when you are either connected to a PABX or using another service offered by your carrier.

Exp: you are connected to a PABX, and wish to call the number 0 XX 48 281 9500:

- type the external access code ;

- press PAUSE + 0 XX 48 2819500.

If you hear a busy tone, hang up the telephone; next, press REDIAL and wait, your telephone set will automatically redial.


Flash: Pressing this key causes a little break in multifrequency

-For programming and using the services offered by your carrier.

-For accessing some features of your PABX.

Your flash time is set at 300 ms.

Mute: By pressing and holding down this key, you interrupt the voice transmission to your correspondent, who will not be able to hear you. To restore the voice transmission again release the key.

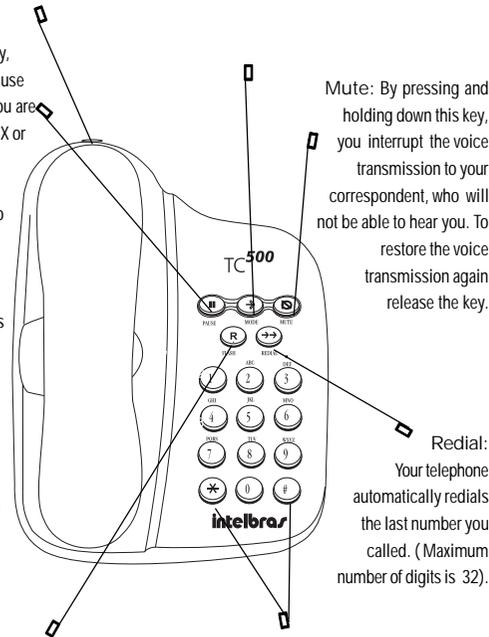

Redial: Your telephone automatically redials the last number you called. (Maximum number of digits is 32).

* and #: These keys are used when the signaling mode of your telephone line is multifrequency type. You can programming services offered either by the carrier or by your PABX.

For telephone models with lock key :

The key is located under the telephone base, and used to lock the keypad, and the user from making calls. Incoming calls can still be received while the lock key is activated.

WARRANTY

Dear consumer,

Under the below mentioned terms and conditions INTELBRAS will cover the cost of replacement parts for one year as well as the labor required to install / service those parts. Simply bring your telephone set into your local INTELBRAS authorized dealer center and he will cover the charges. (Warranty period valid from date of purchase).

At the time of purchase from our authorized INTELBRAS dealer, your telephone set comes with a full 1 (one) year warranty of wich 3 months represent a legal warranty and 9 months as contractual warranty. This warranty covers all problems which are due to manufacturer's defect and will not apply in case of inappropriate use of the product by the customer or as a result of the following :

- ▣ Damages caused by lightning, flood, voltage fluctuation and inappropriate installation not in accordance with the product manual instructions.
- ▣ Any alterations in the product serial number.

Under the above conditions of this warranty close, INTELBRAS reserves the right to make any modification to its product without prior notice

For more information please contact our customer support service at : 0800-7042767
E-mail : support@intelbras.com.br

Code:1124079

Manual's version: 0.1/05

Address :
INTELBRAS S/A
BR 101 - Km 210 - Área Industrial - CEP 88104-800
São José - Grande Florianópolis/SC
Tel : +55 48 32819755 - Fax +55 48 3281 9505
Internet: http://www.intelbras.com