



IVP 9000 MW

Passive infrared motion sensor with microwave

The IVP 9000 MW motion sensor combines microwave detection with passive infrared ray detection.

Features

- » Application in indoor and semi-open environments
- » Automatic sensitivity adjustment
- » Anti-camouflage system
- » Automatic temperature compensation
- » Tamper switch
- » Easy installation
- » RFI/EMI Immunity

Technical specifications

Product code	4540015
Application environment	Internal and semi-open
Communication with alarm panel	Wired
Detection range	18 meters
Detection angle	110°
Detection method	PIR and microwave
Microwave frequency	10,525 GHz
PET Immunity technology	Up to 10 Kg
Number of pyroelectric sensor	2
Pyroelectric sensor type	Quad
Sensitivity	Auto (default, OFF), ou Minimum sensitivity (ON)
Alarm Output	NC, 28 Vdc e 100 mA máx.
Tamper	Rear Tamper
Boot time	60 seconds
Relay opening time	3 seconds
Recommended installation height	2,1 meters
LED color	Red (MW), Yellow (PIR) Blue (Alarme)

Electrical characteristics

Operating voltage	9 ~ 16 Vdc
Operating current	50mA
Consumption	0,60 W

Mechanical characteristics

Sensor Dimensions (W x H x D)	67 x 134 x 54 mm
Approximate gross weight	134 g
Case color	Arctic gray
UV protection	Yes

Environmental characteristics


Operating temperature	-10°C to +50°C
-----------------------	----------------

Product photos



Application scenario

High detection technology

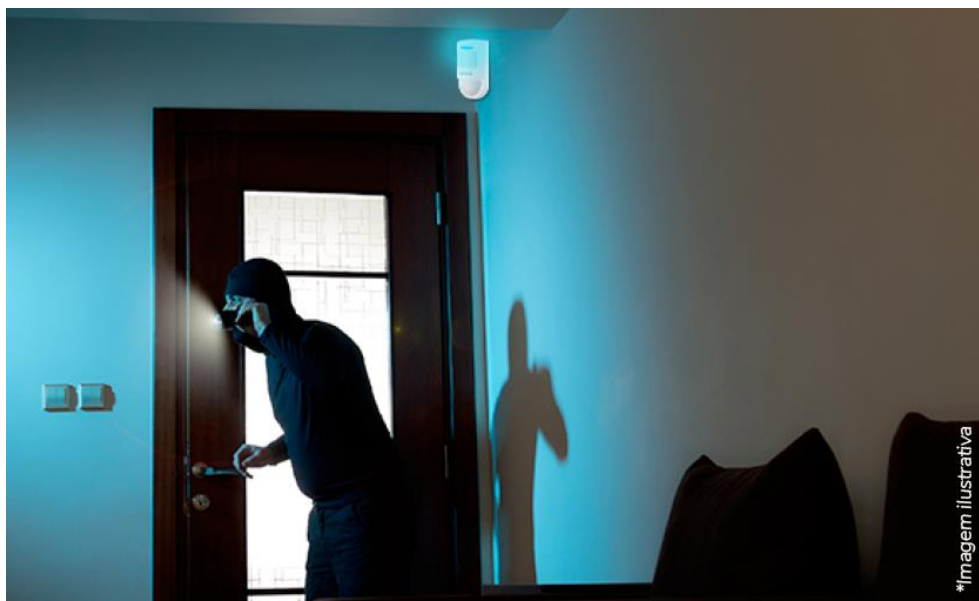

Detection in the crawl zone

