

Home Video Intercom

IVR 1070 HS

The IVR 1070 HS video intercom combines the practicality of installation, the visual experience of image quality on a 7" screen and the best cost-benefit ratio on the market.



- » 7" display
- » Powered by the internal module;
- » Opening of up to 2 locks;
- » Viewing of an extra camera;
- » Night Vision

Technical Specifications

Internal Module


Display technology	TFT — LCD
Screen size	7"
Screen format	16:9
Resolution (H x V)	800 (H) x 480 (V) RGB
Contrast	400:1
Brightness	200 cd / m ²
Angle of view	70°
Dimensions (W x H x D)	24.4 x 19.1 x 6.1 cm
Operating tension	Mains 100 to 240 Vac (automatic)
Frequency of operation	50/60 Hz
Maximum consumption	< 7 W (in use) < 1.5 W (standby)
Weight	535 g
Operating temperature	-10 °C to 50 °C
Actuation of NO-C relay	24 V/1 A

External Module


Pinhole camera	1/4"
Lens	3.7 mm
Horizontal resolution	580 lines
Camera aperture angle	92° diagonal

Minimum illumination - Color mode	1.5 lux
Minimum illumination - B&W mode	0.2 lux
Infrared LEDs	2
Electric lock opening	12 V/1 A
Frequency of operation	50/60 Hz
Dimensions (W x H x D)	9.5 x 14.9 x 5.5 cm
Weight	146 g
Operating temperature	-10 °C to 50 °C

Main functions

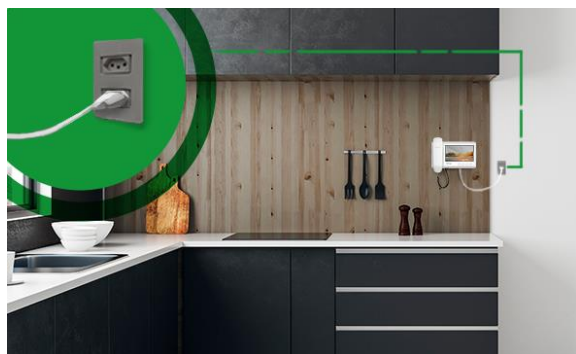

Practicality in the installation through the internal module power supply, which facilitates the installation in environments without power input in the external area.

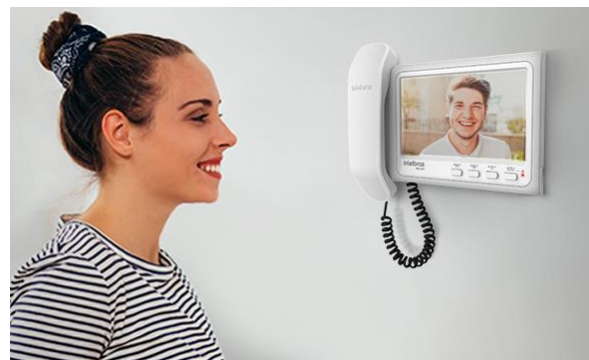

Improved visual experience and image quality when viewing visitors through the **7" display**.



Opening of up to 2 locks through the 7" display. Answer, view, chat, and open locks for visitors in a practical and safe way.



Get even more security at your front door by integrating the **display of 1 extra analog camera** and view it all on your monitor.